

RCS Hy-Q-52

Hydraulic scale for forklift trucks and reach trucks



BENEFITS

- High accuracy hydraulic scale
- User friendly 5" touch display
- Level switch shows vertical mast position (for highest accuracy)
- Intuitive full color touch display guides the user
- Easy calibration due to optimal calibration menu
- Overload indication in the display
- No manifold block: easy and cost efficient installation
- For use in combination with rotators and/or clamps
- Less sensitive to changes to load center point
- Suitable for rough applications

Top quality

Indestructible



Step
into
the
future

FUNCTIONS

- Manual zero correction
- Self-learning zero correction
- Gross/Net weighing
- Tare memory for 10 values
- ID-code entry for 4 ID-codes with 10 preset codes (each max. 14 characters alpha-numeric)
- 10 totalizing registers
- Internal clock for date and time
- On board: RS232 port connection for printer
USB output for data transfer (with USB Stick)
Free COM 1 for Wifi or RS232
Free COM2 for Wifi or RS232
- The USB output can also be used to connect a bar-code scanner (end of 2018)
- Bluetooth 4.0 for RAVAS WeightsApp
- Overload indication based on actual hydraulic pressure
- Error message in display incl. logging

STANDARD SPECIFICATIONS

- Capacity 2.500 kg to 99,000 kg
- Graduation 2 kg at 2,500 kg capacity
5 kg at 5,000 kg capacity
10 kg at 10,000 kg capacity
20 kg at 25,000 kg capacity
50 kg at 50,000 kg capacity
100 kg at 99,000 kg capacity
- System tolerance +/- 0.2 % of the scale capacity
- Display full-color 5" touch display
- Keyboard display mode defines the available keys
- Protection class IP65
- Power supply 9Vdc - 100Vdc input, built-in regulator / convertor board
- Dimensions indicator L x B x H = 85 x 165 x 115 mm


SYSTEM PACKAGE

- Hy-Q-52 indicator with 5" touch display
- RAM indicator mounting support
- Oil pressure sensor G¼" BSP male thread
- Metal strip with 2 sensors for mast mounting
- Magnet to be installed on the carriage plate
- Level switch for vertical mast position
- Installation and calibration manual
- Operator manual

HOW RCS HY-Q WORKS

The metal strip with the two magnet sensors has to be mounted on the mast to measure the lifting and lowering speed of the carriage plate. When the carriage plate passes the trajectory between the two sensors, the indicator samples the hydraulic pressure output of the sensor approximately 1,000 times and calculates an average value. The weighing will be done UP and DOWN: the load is lifted, and then lowered, passing the two sensors within a predefined speed bandwidth. If the RCS HY-Q-52 is installed on a reach truck (or stacker truck) where the hydraulic pump is used for re-generating power during lowering, the menu and calibration should be set to weighing in UP-mode only.

Warning: the +/- 0.2% tolerance can only be guaranteed if the truck mast is in good condition.

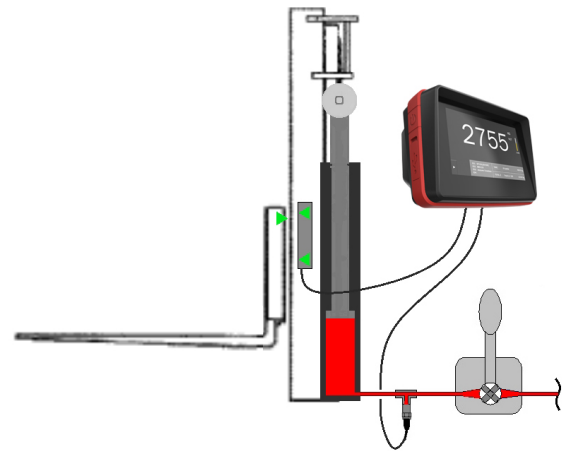

• ISO 9001
• ISO 14001

OPTIONS*

- Thermal or matrix printer
- 2 additional COM-ports for RS232, Bluetooth and/or WiFi connection
- Ticket label printer (end of 2018)
- Cubetape digital dimensioning tool via Bluetooth (end of 2018)
- 1D USB bar-code scanner (end of 2018)

RAVAS Europe B.V.

P.O. Box 2023, NL-5300 CA Zaltbommel, The Netherlands
T. +31 (0)418 51 52 20, F. +31 (0)418 51 53 20
backoffice@ravas.com, www.ravas.com

* The use of options may change related specifications, changes reserved, rev.20180608

RAVAS